

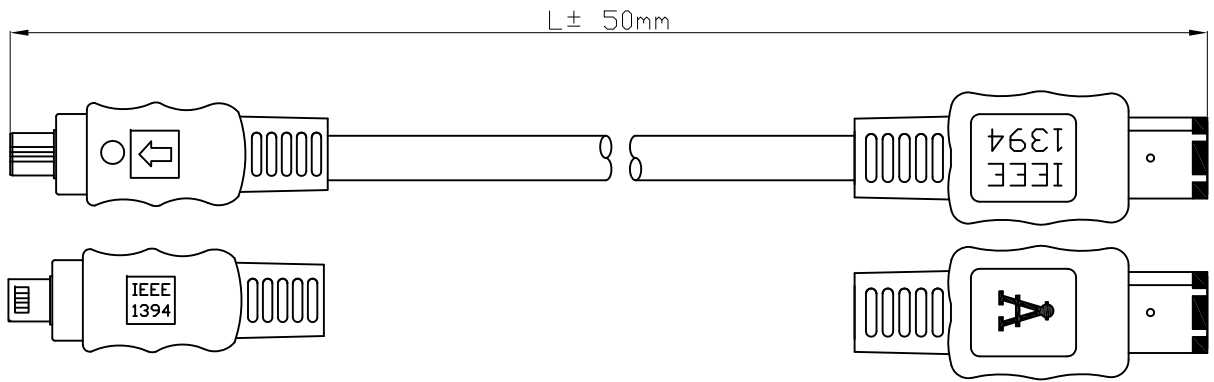



1 2 3 4 5 6 7



**NOTE:**

1. CABLE: [28AWG(7/0.127)T.C\*1PAIR+AL/MYLAR+SPIRAL(66/0.08)]\*2+FILLER+MYLAR\*2+BRAID(95%)+PVC JACKET COLOR:MATT BLACK.  
OD:6.0±0.15mm UL20276 IEEE 1394 CABLE
- 2.CONNECTOR:  
P1: IEEE1394 4PIN MALE GOLD PLATED 15u" CONTACT NICKEL PLATED SHELL.  
P2: IEEE1394 6PIN MALE GOLD PLATED 15u" CONTACT NICKEL PLATED SHELL.
- 3.HOOD: P1: MOLDED TYPE,COLOR:MATT BLACK.  
P2: MOLDED TYPE,COLOR:MATT BLACK.
- 4.TEST REQUEST:  
<1>.100% OPEN SHORT MIS WIRE TEST  
<2>.CONTACT RESISTANCE 3 OHMs MAX  
<3>.INSULATION RESISTANCE 20M OHMs MIN
- 5.PACKING: SEE P-0039 REV.C PACKING DRAWING  
PACKING TYPE: DB VP2  
(HANKING SIZE MUST BE SMALLER THAN PACKING)

EAN Code:  
**4016032078081**

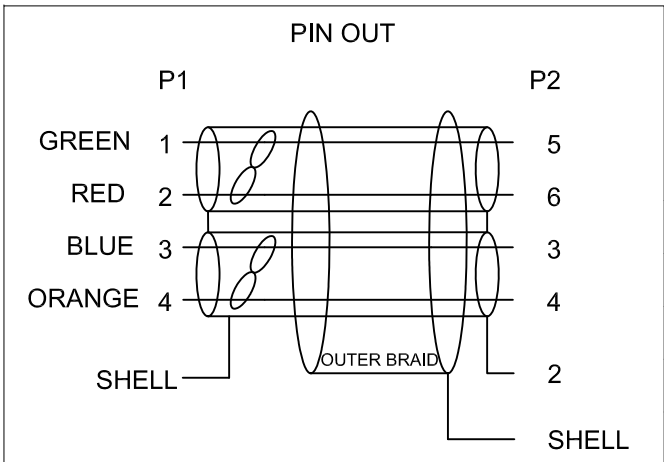

ASSMANN WSW P/N	LENGTH
AK-1394-104	1.0 M
AK-1394-184	1.8 M
AK-1394-304	3.0 M
AK-1394-504	5.0 M

**RoHS compliant**

Scale	FREE					Date	Name	Customer-No.
TOLERANCE					Drawn	06.07.2009	Rale	
X.	±X				Approved	06.07.2009	Meng	ASSMANN WSW-No. AK-1394-104 AK-1394-184 AK-1394-304 AK-1394-504
X.X	±X							Drawing-No.
X.XX	±X							<b>ASS 3646 CA</b> rev01
DIM	TOL							Replace
X.°	±X°							Sheet
X.X°	±X°	①	Drawn	06.07.2009	Rale			
Angle	TOL	Id.	Modification	Date	Name			



1 2 3 4 5 6 7