


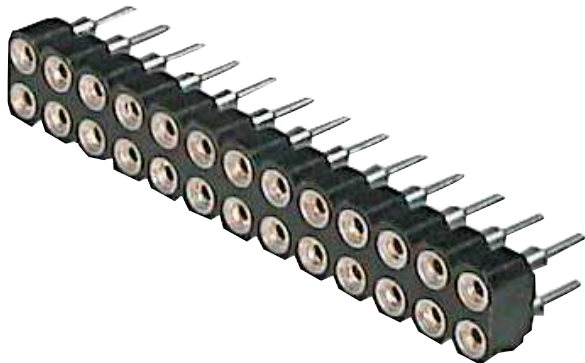

Isolierkörpermaterial
PBT, UL94V-0

Kontaktmaterial
Hülse - Messing
Clip - Phosphorbronze

Kontaktfläche
Ni, Au / Sn

Kontaktwiderstand
4mΩ max

Isolationswiderstand
10000MΩ min

Strombelastbarkeit
3A

Betriebstemperatur
-40°C - +105°C

Betriebsspannung
100V AC

Prüfspannung
500V AC

Verpackung
Kunststoffbeutelverpackung

Insulator material
PBT, UL94V-0

Contact material
Sleeve - Brass
Clip - Phosphor bronze

Plating
Ni, Au / Sn

Contact resistance
4mΩ max

Insulation resistance
10000MΩ min

Current rating
3A



Operating temperature
-40°C - +105°C

Operating voltage
100V AC

Test voltage
500V AC

Packing
Polybag packing

Dimensions	
No. of Contacts	A
10	12.70
14	11.78
16	20.32
20	25.40
26	33.02
32	40.64
34	43.18
40	50.80
50	63.50
60	76.20

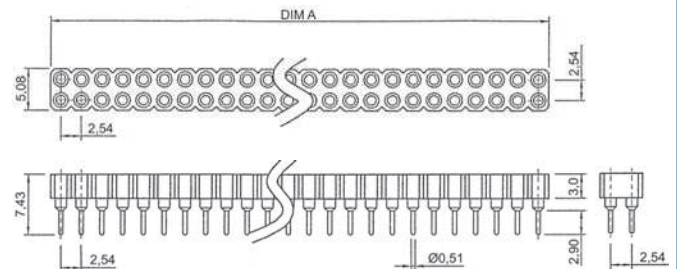

Bestellcode / Ordercode

Polzahl

10 / 14 / 16 / 20 / 26 / 32 /
34 / 40 / 50 / 60 / 64

No. of contacts

10 / 14 / 16 / 20 / 26 / 32 /
34 / 40 / 50 / 60 / 64

Oberfläche Lötstift

Z - Zinn

Plating sleeve

Z -Tinn

AWD **127** / **xx** / **Z** - **T**

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ appropriate option