

Art No. CV0052A

HDMI to VGA and Audio Cable

This HDMI to VGA/Audio Converter converts digital HDMI signal into analog VGA video signal and R/L audio signal. It allows users to enjoy their high definition image and sound when watching movies or playing games on the traditional VGA monitors or projectors.


It offers solutions for digital entertainment center, HDTV retail and show site, HDTV, STB, DVD and Projector factory, noise space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.

Features :

- Converts digital HDMI signals to analog VGA
- Input: HDMI connector
- Output: VGA and Audio
- Supports HDMI standard specification
- Resolutions: 480i, 576i, 480p, 576p, 720p, 1080i and 1080p
- Cable Length: 2 Meter

Specification:

Name	Parameter Values
Input Video Signal	0.5-1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Power consumption (Max)	0.75W
Input connection	HDMI A female (19pin)
Output connection	VGA, R/L

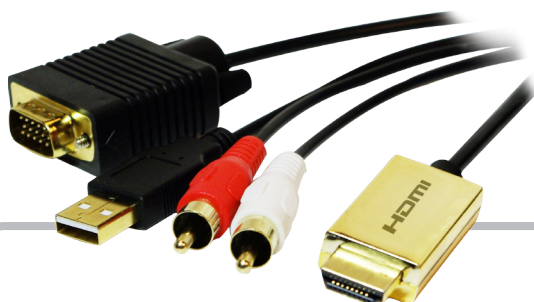

Art No. CV0052A

HDMI to VGA and Audio Cable

HDMI video input format	480i/576i/480p/576p/720p/1080i/1080p
VGA video output format	480i/576i/480p/576p/720p/1080i/1080p
Audio output format	2 channel LPCM
Vertical Frequency Range	50/60Hz
Input Video Amplifier Bandwidth	1.65Gpbs/165MHz
Operating Temperature	0 °C to +70°C
Operating Humidity	10% to 85%RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 95 % RH (no condensation)
External Power Supply	USB Power

Package Contents:

- 1 x HDMI to VGA, Audio and USB Cable
- 1 x User Manual

Packaging Information:

- Packing Dimension: 159 x 250 x 39 mm
- Packing Weight: 0.23 kg
- Carton Dimension: 420 x 340 x 270mm
- Carton Q'ty: 20 pcs
- Carton Weight: 5.5 kg

