





OD 5.7MM (30AWG)

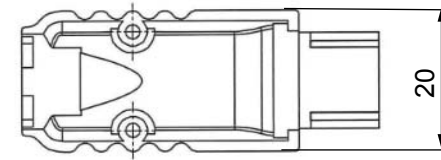

ONE EXTRA PROTECTOR FOR 24 AWG

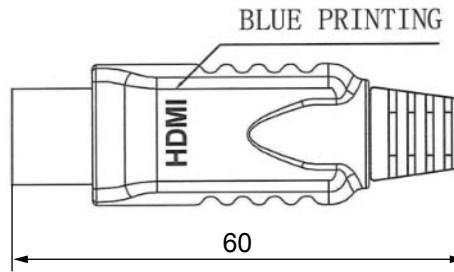

Kontakt Typ A / contact Typ A	Signal / signal
Pin 1	TMDS Data2+
Pin 2	TMDS Data2 Schirm
Pin 3	TMDS Data2-
Pin 4	TMDS Data1+
Pin 5	TMDS Data1 Schirm
Pin 6	TMDS Data1-
Pin 7	TMDS Data0+
Pin 8	TMDS Data0 Schirm
Pin 9	TMDS Data0-
Pin 10	TMDS Clock+
Pin 11	TMDS Clock Schirm
Pin 12	TMDS Clock-
Pin 13	CEC
Pin 14	reserviert (HDMI 1.0-1.3), HEC Data- (HDMI 1.4)
Pin 15	SCL (I <sup>2</sup> C serieller Takt für DDC)
Pin 16	SDA (I <sup>2</sup> C serielle Datenleitung für DDC)
Pin 17	Masse für DDC / CEC / HEC
Pin 18	+5 V Versorgungsspannung (max. 55 mA)
Pin 19	Hot-Plug-Erkennung (alle Versionen), HEC Data+ (HDMI 1.4)

HDMI™ Stecker in Metall  
 - zur Selbstmontage, Lötversion  
 - mit Goldkontakten

HDMI™ plug in metal version  
 - for Do-it-yourself installation, solderable  
 - with gold plated contacts

Änderungen

Datum	Name	gez.:	Datum	Name
		gez.:	23.05.2016	jr
		gepr.:		
		Norm:		
Änderungen vorbehalten / Subject to change				

Bezeichnung	Blatt
HDMI Stecker	1
Zeichnungs-Nr.:	von
52609	

