
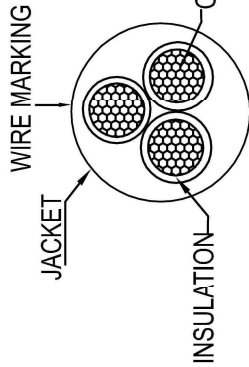
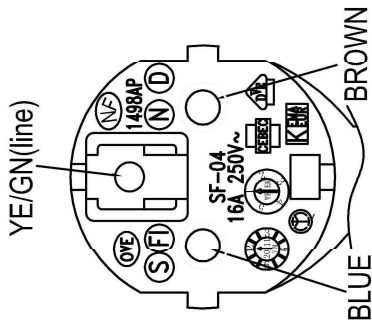


ROHS COMPLIANT

A/O

DATE	REV	DESCRIPTION	BY	CHECK
	A/O			

⚠ 1500±35

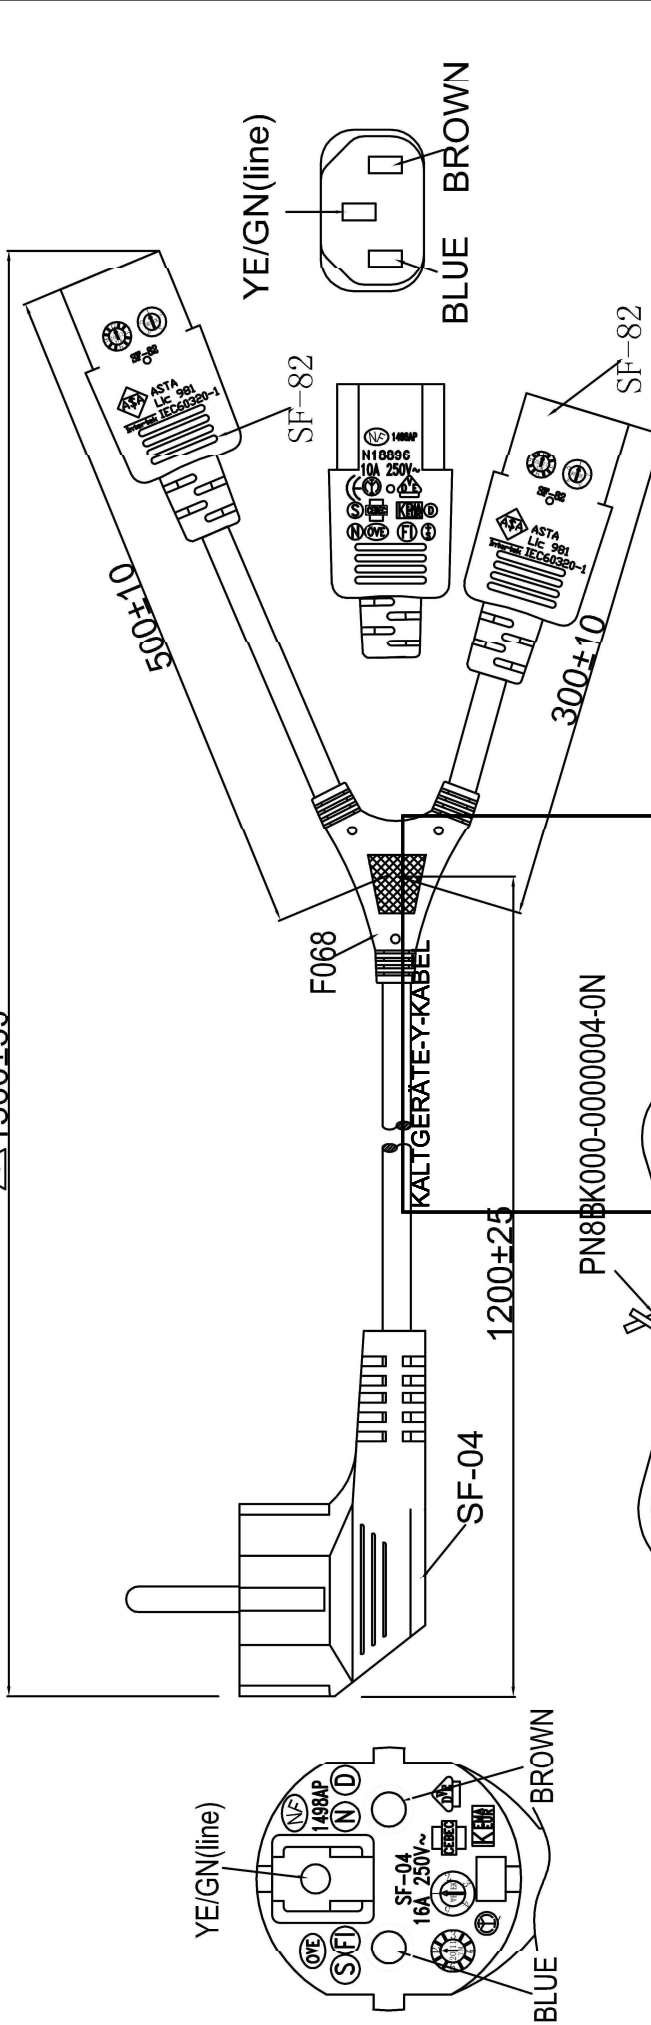

**WIRE MARKING:** + 0 + 0 + 0 KEMA-KEUR (S)(N)(D)(F) Δ CEBEC 972 ◀ VDE ▶ NF-USE 1345 IEM/EQU H05VV-F 3G0.75MM<sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436

**WIRE MARKING:** + 0 + 0 + 0 KEMA-KEUR (S)(N)(F) Δ CEBEC 972 ◀ VDE ▶ NF-USE 1345 IEM/EQU H05VV-F 3G 0.0MM<sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436

Conductor 導體		Insulation 絕緣體		Jacket 被覆體		Overall Diameter 完成外徑	
mm <sup>2</sup>	Resistance maximum 最大電阻(≤)	Min. Thickness 最小厚度	Diameter 絕緣外徑	Length of Lay 芯絞	Min. Thickness 最小厚度	Avg. Thick 平均厚度	Overall Diameter 完成外徑
0.75	at 20°C, 26.0ohms/km	0.44mm	2.4±0.1mm	130 ± mm	0.58mm	0.8mm	6.8±0.1mm
1.0	at 20°C, 19.5ohms/km	0.44mm	2.5±0.1mm	130 ± mm	0.58mm	0.8mm	7.0±0.1mm

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)

PAGE	1/1
重點尺寸	⚠
Unless specified on the drawing, tolerances are per the follows: X ±1 XX ±0.2 XX ±0.05	
DESCRIPTION	CP101 Y-Power Cord, Schuko IEC Plug, right angled to 2 x Schuko Female C13
CUSTOMER NAME	CUSTOMER NO.
CUSTOMER PART NO.	DRAW
SCALE	CHECK
UNIT	APPROVAL
PATH NAME	//D//DEY
3RD	⊕

**Power Cable**

**LogiLink®**

CP101  
Y-Power Cord, Schuko IEC Plug, right angled to 2 x Schuko Female C13  
Color: Black  
Length: 1.5M  
RoHS compliant  
Made in China  
4 260113 575727

Label Size: 70 x 50 mm  
R = 2mm

- ELECTRIC TESTING:**
- 100% OPEN & SHORT TESTING.
  - VOLTAGE RATING: AC ≥2000V/S ≥0.5MA
  - PLUG(SF-04) RATED POWER: 250V 10/16A
  - PLUG(SF-82) RATED POWER: 250V 10A
  - WIRE: H05VV-F 1.0/3GX1 RATED VOLTAGE: 300/500V
  - WIRE: H05VV-F 0.75/3GX2 RATED VOLTAGE: 300/500V
  - COLOR: BLACK