
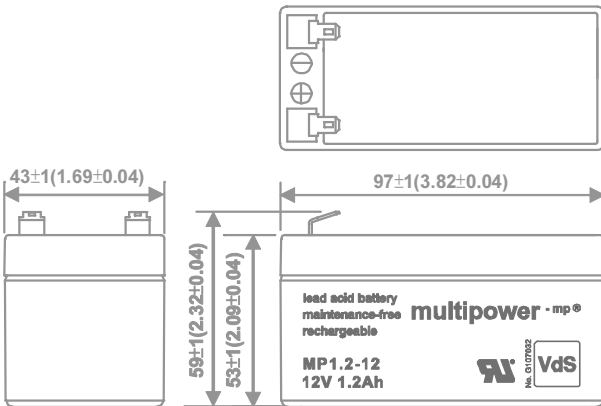


MP1,2-12



Nominal Voltage(V) 12V

Nominal Capacity

20 hour rate	(0.06A to 10.50V)	1.2Ah
10 hour rate	(0.114A to 10.50V)	1.14Ah
5 hour rate	(0.204A to 10.20V)	1.02Ah
1 C	(1.2A to 9.60V)	0.68Ah
3 C	(3.6A to 9.60V)	0.48Ah

Weight Approx. 610g(1.34Lbs.)

Internal Resistance (at 1KHz) Approx. 78 mΩ

Maximum Discharge Current for 5 seconds: 18A

Charging Methods at 25°C(77°F)

Cycle use:
 Charging Voltage 14.4 to 15.0V
 Coefficient -5.0mv/°C/cell
 Maximum Charging Current: 0.36A
 Standby use:
 Float Charging Voltage 13.50 to 13.80V
 Coefficient -3.0mv/°C/cell

Operating Temperature Range

Charge -15°C(5°F) to 40°C(104°F)
 Discharge -15°C(5°F) to 50°C(122°F)
 Storage -15°C(5°F) to 40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month 92%
 3 month 90%
 6 month 80%

Case Material ABS
 (UL94 HB flame retardant case / cover)

Terminal F1(Faston Tab 187)

