


Construction



Wiring Method

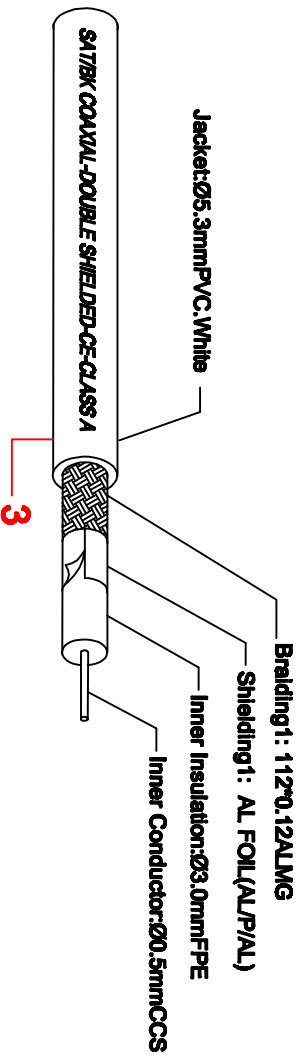

1. dimensions As shown
2. Insulation resistance ≥ 100 up to 500V=
2 KV 50Hz 2 sec.
3. dielectric strength
4. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
5. 100% ROHS COMPLIANT.

No	Item	Length	Packaging
50723	BKM 0150	1.5m	1/10/80/160
50724	BKM 0250	2.5m	1/10/80/120
50742	BKM 0350	3.5m	1/10/40/80
50725	BKM 0500	5.0m	1/10/30/60
50726	BKM 0750	7.5m	1/5/20/40
50722	BKM 1000	10	1/5/20/40

7	MOULDED	PVC 4SP White		2*12g
6	FERRITE	φ9.8mm H:13.5mm		4PCS
5	Copper coil	φ4.5mm H:8mm		2PCS
4	MOULDED	PVC 4SP White		2*10g
3	CABLE	φ5.3 RG58 COAXIAL CABLE White(According to the chart)		L
2	CONNECTOR#2	COAX 9.5 Jack (Nickel plating 100%Shielded)		1set
1	CONNECTOR#1	COAX 9.5 Plug (Nickel plating 100% Shielded)		1set
NO	Item Name	SPEC		QTY
Edition	WEC/000	Scale		
Designed by	ming hong	Item Name	COAX PLUG TO COAX JACK COAXIAL CABLE WITH FERRITE	
Checked by		Item NO	BKM series cable	
Approved by		Unit	MM	
Date	11.28.2013			