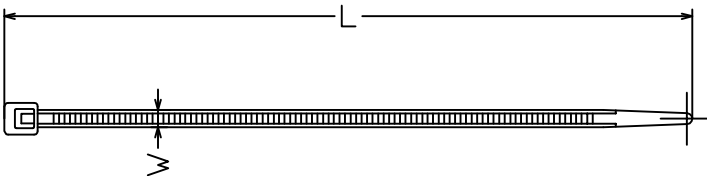



	G	F	E	D	C	B	A													
1	ITEM: FIX-S-2.5X200							1												
2								2												
3								3												
4								4												
5	NOTE: TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F) INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK ± 0.0078 , WIDTH ± 0.0039 , THICKNESS ± 0.0019 , LENGTH ± 0.039 . MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK ± 0.2 , WIDTH ± 0.1 , THICKNESS ± 0.05 , LENGTH ± 1 .				<table><tr><td>MATERIAL:</td><td>ASCEND PA66 FOR ALL COLOR PRODUCTS</td></tr><tr><td>LEMGTH:</td><td>200MM (7.87 INCH)</td></tr><tr><td>WIDTH:</td><td>2.5MM (0.10 INCH)</td></tr><tr><td>THICKNESS:</td><td>1.10MM (0.043 INCH)</td></tr><tr><td>TENSILE STR.</td><td>18 LBS (8.1 KGS)</td></tr><tr><td colspan="2">Fix & Fasten</td></tr></table>			MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS	LEMGTH:	200MM (7.87 INCH)	WIDTH:	2.5MM (0.10 INCH)	THICKNESS:	1.10MM (0.043 INCH)	TENSILE STR.	18 LBS (8.1 KGS)	Fix & Fasten		5
MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS																			
LEMGTH:	200MM (7.87 INCH)																			
WIDTH:	2.5MM (0.10 INCH)																			
THICKNESS:	1.10MM (0.043 INCH)																			
TENSILE STR.	18 LBS (8.1 KGS)																			
Fix & Fasten																				
6								6												
	G	F	E	D	C		