
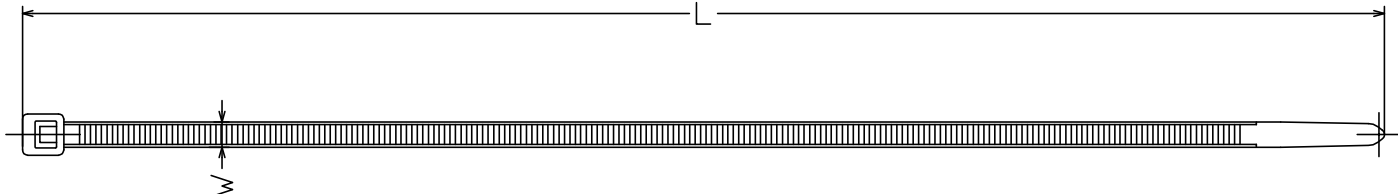



	G	F	E	D	C	B	A									
1	ITEM: FIX-S-4. 8X300S															
2																
3																
4																
5	NOTE: TEMPURATURE RANGE: -40C TO +85C (-40F TO 185F) INCH TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK ± 0.0078, WIDTH ±0.0039, THICKNESS ±0.0019, LENGTH ±0.078. MILLIMETER TOLERANCE UNLESS OTHERWISE SPECIFIED: LOCK ±0.2, WIDTH ±0.1, THICKNESS ± 0.05, LENGTH ± 1.				<table><tr><td>MATERIAL:</td><td>ASCEND PA66 FOR ALL COLOR PRODUCTS</td></tr><tr><td>LEMGTH:</td><td>300MM (11.81 INCH)</td></tr><tr><td>WIDTH:</td><td>4.8MM (0.19 INCH)</td></tr><tr><td>THICKNESS:</td><td>1.2MM (0.047 INCH)</td></tr><tr><td>TENSILE STR.</td><td>50 LBS (22.2 KGS/222N)</td></tr></table>		MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS	LEMGTH:	300MM (11.81 INCH)	WIDTH:	4.8MM (0.19 INCH)	THICKNESS:	1.2MM (0.047 INCH)	TENSILE STR.	50 LBS (22.2 KGS/222N)
MATERIAL:	ASCEND PA66 FOR ALL COLOR PRODUCTS															
LEMGTH:	300MM (11.81 INCH)															
WIDTH:	4.8MM (0.19 INCH)															
THICKNESS:	1.2MM (0.047 INCH)															
TENSILE STR.	50 LBS (22.2 KGS/222N)															
6					Fix & Fasten											
	G	F	E	D	C											