



ASSEMBLY INSTRUCTION




NL4FX / NL4FRX

speakON® SPX Series | Lockable Loudspeaker Connector

IMPORTANT SAFETY INSTRUCTION

Electrical Rating acc. UL & CSA:
USR: 40A/250V, CNR: 25A/250V

“CAUTION: NOT FOR INTERRUPTING CURRENT”
“ATTENTION: NE PAS UTILISER POUR COUPER LE COURANT”

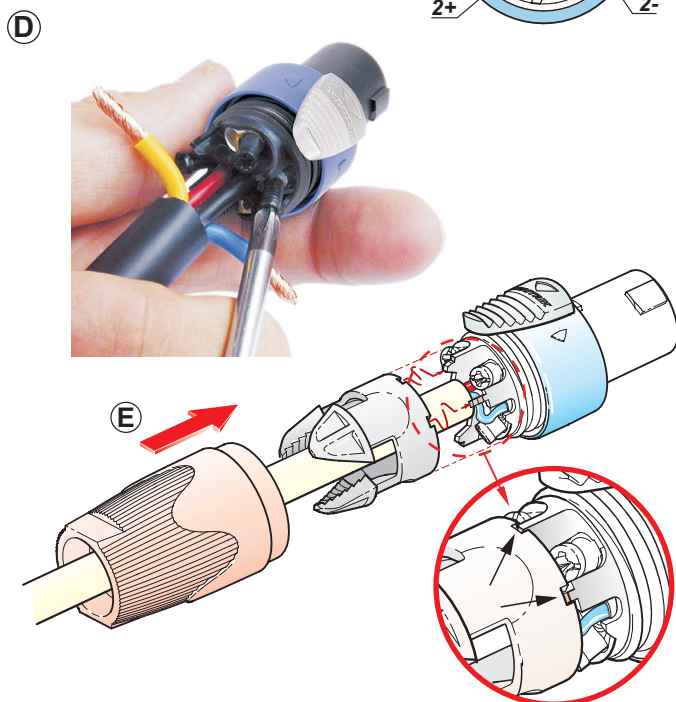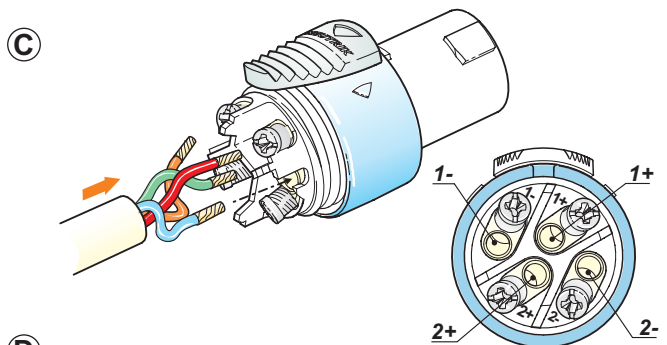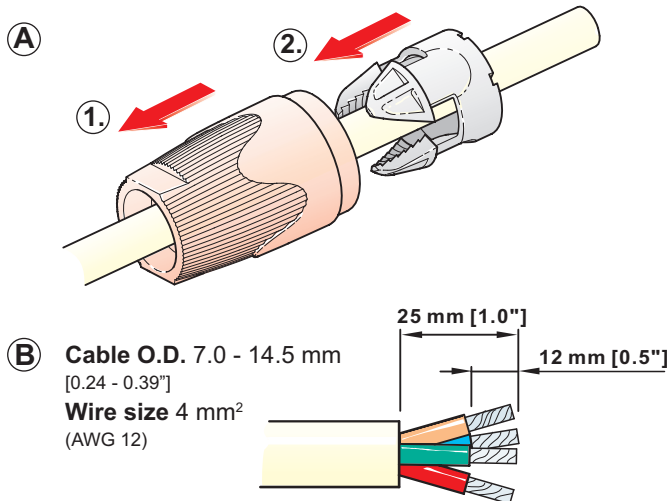


Assembly of the Connector:

- A** Place bushing and chuck over cable.
- B** Prepare cable as shown.
Important is the stripping length of 25 mm and 12 mm.
- C** Insert wires into terminals and secure clamp terminals with screw driver (POZIDRIV® #1) at max. torque 0.8 Nm.
For 6 mm² (AWG 10) remove screws, clamping sheet and solder.
- D** For easy wiring especially on big cables, first screw on the inner contacts 1+ and 2+ and afterwards the outer contacts 1- and 2- !

- E** Push chuck up to housing .
Important: Align the chuck by positioning the nose into the recess.

- F** Tighten the bushing


INFO to the screw driver:

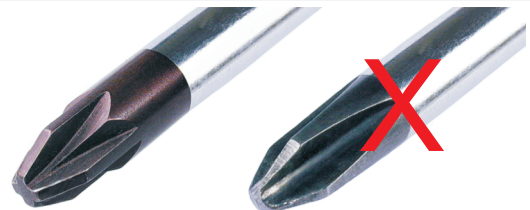

DO NOT USE!


POZIDRIV® #1

Philips

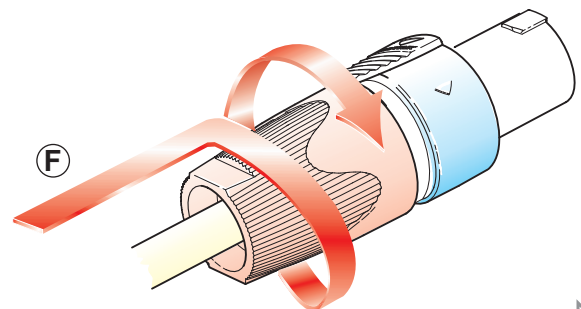




Assembly of the Conversion Kit LRX:

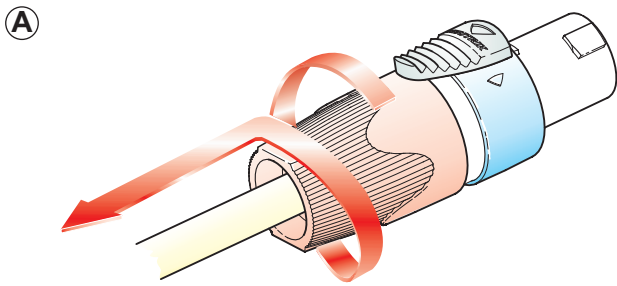

A Open the bushing.

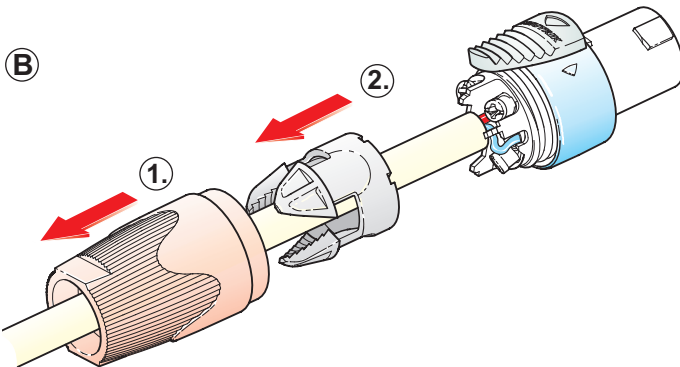

B Slide the bushing and the chuck back.


C Bend the cable as shown.

D Position the two conversion shells to fit on the connector thread.

E Press together and fix by screw.

F Slide the chuck onto the housing and fasten the bushing.

Important: Align the chuck by positioning the nose into the recess.

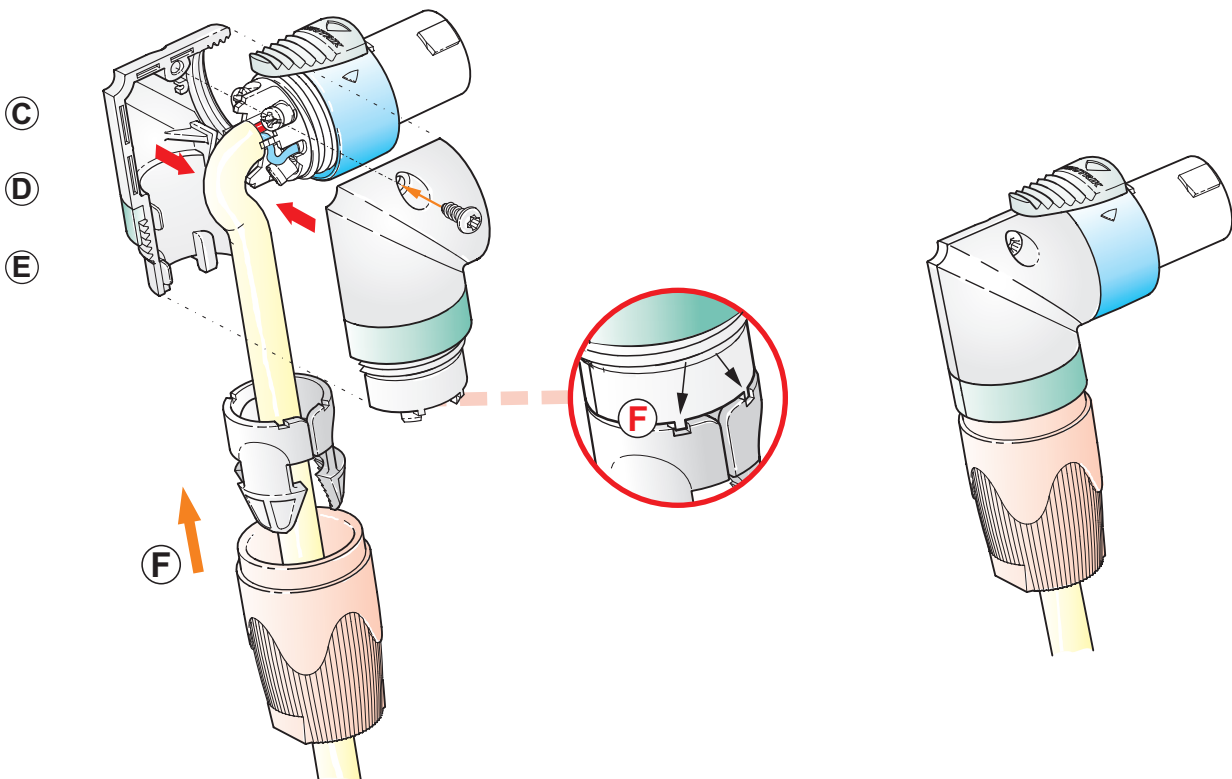

| | | | | | | | |
|------------------------|-------------|-----------------------|---------------------|-------------------------|-----|----------------------|---------------------|
| NEUTRIK AG | LI | T: +423/237 24 24 | F: +423/232 53 93 | NEUTRIK France | FR | T: +33 1/4131 6750 | F: +33 1/4131 0511 |
| NEUTRIK USA Inc. | USA | T: +1 704 / 972 3050 | F: +1 704/438 9202 | NEUTRIK Tokyo Ltd. | JP | T: +81 3/3663 4733 | F: +81 3/3663 4796 |
| NEUTRIK (UK) Ltd. | UK | T: +44 1983 / 811 441 | F: +44 1983/811 439 | NEUTRIK Hong Kong Ltd. | HK | T: +852/2687 6055 | F: +852/2687 6052 |
| NEUTRIK Vertriebs GmbH | DE/NL/AT/DK | T: +49 8131 / 280 890 | F: +49 8131/280 830 | NEUTRIK India Pvt. Ltd. | IND | T: +91/982 05 43 424 | F: +91/22 26163 540 |